



AFC Srl Handling Equipment

20122 Milano - V.le Regina Margherita 30 +39 02 98876001

29017 Fiorenzuola (PC) - Via Gobetti 4 +39 0523 349769


info@afhandling.com

www.afhandling.com

- ELEVATORE SEMIELETTRICO Multiuso
- SEMI ELECTRIC LIFTER Multipurpose
- ELEVATEUR SEMI ELECTRIQUE Polyvalent
- APILADOR SEMI ELECTRICO Multiusos

ABL



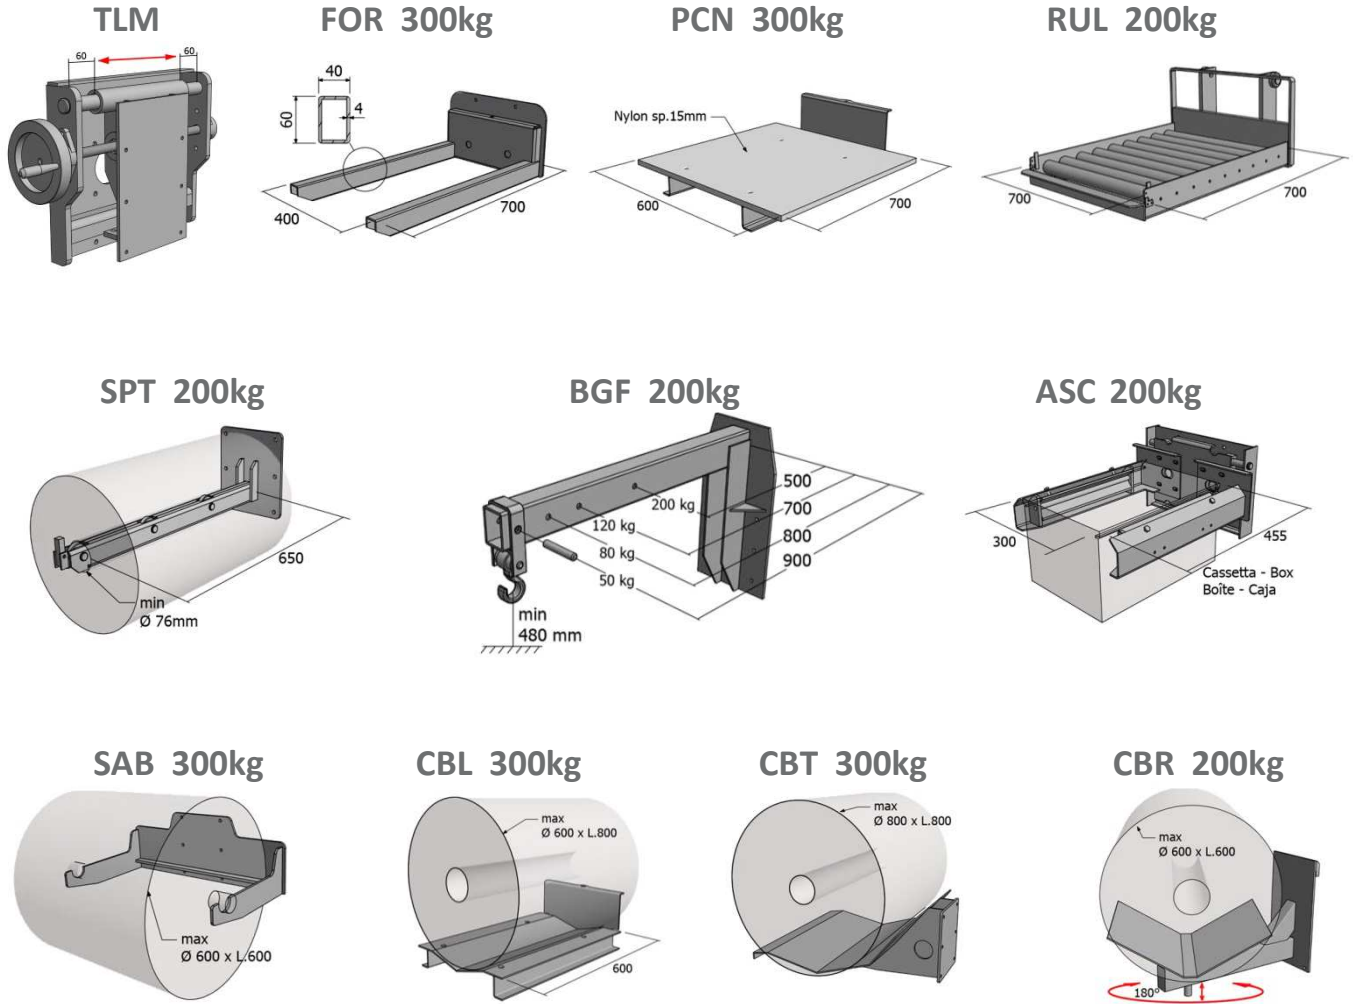

IDENTIFICAZIONE	IDENTIFICATION	IDENTIFICATION	CARACTERISTICAS	
Modello	Manufacturer's type	Modèle	Modelo	ABL
Guida	Drive	Conduite	Accionamiento	Manual
Tipo di operazione	Type of operation	Type d'opération	Conduccion	Pedestrian
Portata	Load capacity	Capacité	Capacidad de carga	Q1= 300 Kg
Portata	Load capacity	Capacité	Capacidad de carga	Q2= 200 Kg
Peso batt. incl.	Service weight incl. batt.	Poids avec batterie	Peso propio con batería	140 / 180 Kg
RUOTE/TELAIO	WHEELS/CHASSIS	ROUES/CHASSIS	RUEDAS/CHASSIS	
Ruote (ant/post)	Tyres	Roues	Bandajes (del/atr)	PU/PU
Dim. Ruote ant.	Tyres size, front	Roues avant	Dim. Ruedas del.	80x40 mm
Dim. Ruote post.	Tyres size, rear	Roues arrière	Dim. Ruedas traseras	150x40mm
N. ruote (x=motrice)	Wheels N. (x=driven)	N. roues (x=motrice)	Cantidad (x=motrices)	N. 2+2
PRESTAZIONI	PERFORMANCE DATA	PERFORMANCES	RENDIMIENTOS	
Velocità trazione	Traction speed (load/unl.)	Vitesse tract. (a/s charge)	Velocidad de traslación (c/s)	Manual
velocità discesa	Descent speed (load/unl.)	Vitesse despence (a/s charge)	Velocidad de descenso (c/s)	0,10 ms
Velocità sollevamento	Lifting speed (load/unl.)	Vitesse levage (a/s charge)	Velocidad de elevación (c/s)	0,18 ms
Freno	Service Brake	Frein de service	Frenado	Pedal
MOTORE	E-MOTOR	MOTEUR	ACCIONAMIENTO	
Motore sollevamento	Load capacity	Moteur de levage	Motor de elevación	24V-500W
Batteria	Battery	Batterie	Bateria	2x12V-44Ah
Peso batteria	Battery weight	Poids batterie	Poid batería	2x14 Kg
Raddrizzatore	Charger	Chargeur incorporé	Cargador	HF 24V-10A